

Stratos® HSSD®

HIGH SENSITIVITY ASPIRATING SMOKE DETECTOR



Key Features

- Affordably priced, feature rich Aspirating Smoke Detector provides coverage for up to 20,000 sq. ft.
- High sensitivity provided by laser based forward light scatter mass detection with particle evaluation for reliable very early warning.
- Four sampling pipes, up to 820ft (250m) maximum total length (aggregate) and up to 100 sample ports.
- Unique ClassiFire® Perceptive Artificial Intelligence system that dynamically adjusts the detector's operating parameters, allowing for day to day changes in the protected environment and filter loading.
- Unwanted alarms from dust are avoided using patented Dual Technology LDD 3D³ Laser Dust Discrimination and elimination system.
- RS485 and RS232 communications built in as standard for networking, and remote communications.
- Rugged steel enclosure option available. Suitable for industrial environments.

Description

Stratos-HSSD has unmatched sensitivity potential, providing the very earliest warning of incipient fire with minimal rate of nuisance alarms.

ClassiFire Perceptive Artificial Intelligence ensures that the detector operates at optimum sensitivity for the protected environment, without the need for complex setup. This means the product will configure itself to provide high sensitivity in a computer room or reduced sensitivity in areas with a high ambient background.

Equipped with four alarm relays (Auxiliary, Pre-Alarm, Fire 1 and Fire 2), fault relay and 3 pairs of remote control input terminals. The inputs

may be configured for a number of functions, see technical documentation for full details. Relay outputs provide a convenient method for remote monitoring by local fire alarm panels or Building Management Systems. Open Protocol available for 3rd party integration.

IP-50 rated enclosure provides superior protection of circuitry and provides easy access to internal termination points for wiring or servicing.

Applications & Acceptance

Stratos detectors have been successfully applied in tens of thousands of applications worldwide, ranging from Clean Rooms to Casinos.


Options Available

- Addressable Protocol Interface Cards APIC™ available for most popular industry signaling protocols.
- Command Module available for central monitoring and display.
- SenseNET compatible - up to 127 detectors per loop.
- Remote Display units available.
- A lower cost Minimum Display version is available which features a robust rugged steel enclosure.
- Suitable for Stratos-MatrixScan, a patented software system which provides virtual addressable location detection - e.g. 10 physical detectors would provide up to 45 unique addressable locations.

Approvals

- Approved/listed by most major international fire protection certification agencies including UL, cUL, FM, MEA, CSFM. Contact AirSense Technology for other international listings.

Stratos-HSSD Mounting Plate Dimensions

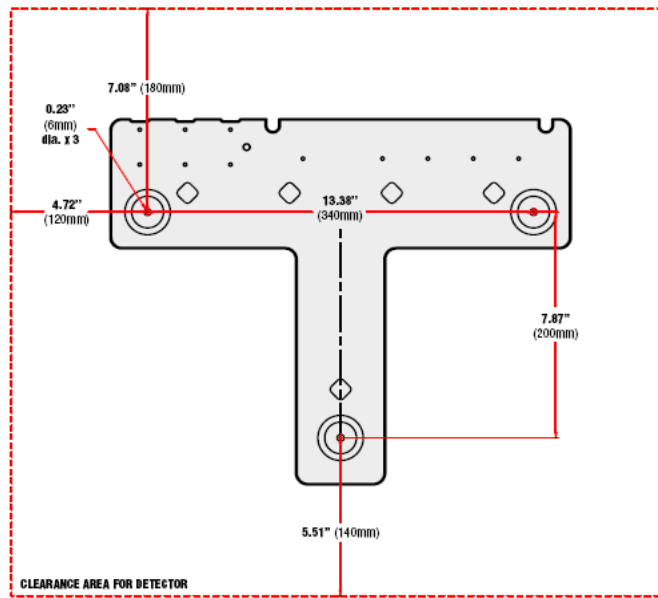

SPECIFICATIONS Stratos-HSSD

Supply Voltage	21.6 – 26.4V DC
Current Consumption	450mA @ 24V DC @ fan speed 8
Size	16.81w x 14.65h x 3.74d (inch) 427w x 372h x 95d (mm)
Weight	11.50b (5.2kg)
Operating Temperature Range	14 to 100.4°F (-10 to 38°C) (UL268)
Operating Humidity Range	0 - 90% non-condensing
Measurement Range	0.00046% to 7.62% obs/ft (0.0015% to 25% obs/m)
Maximum Display Resolution	0.00046% obs/ft (0.0015% obs/m)
Detection Principle	Laser light scattering mass detection and particle evaluation
Particle Sensitivity Range	0.003μ to 10μ
Dust Discrimination Principle	3D ³ ™ Laser Dust Discrimination (LDD)
Alarm Levels	4 (Aux, Pre-Alarm, Fire 1 and Fire 2)

Recommended max. Pipe Length	330ft (100m) per inlet, 820ft (250m) aggregate (entire Detector)
Sampling Pipe Diameter	¾" (19mm) Nominal bore, 1" (27mm) OD
Bargraph Segments	26
Recommended maximum number of sampling ports	25 per inlet, 100 total aggregate entire detector
Laser Lifetime (MTTF)	Greater than 1000 years
Programming	Command Module or PC via RS232/RS485
Network Data Bus	RS-485
Maximum total Data Bus Length	4000ft (1200m)
Supported Languages on Internal Programmer	English, French, German, Spanish, Swedish
IP Rating	IP50
Sampling Pipe Inlets	4 on top, 4 at rear
Exhaust Air Pipe Outlets	1 on top, 1 at rear

ORDERING INFORMATION

Part No.	Description
30621	Stratos-HSSD
30706	Rugged Steel Enclosure Version
30710	Minimum Display Version
30699	Replacement Filter Cartridge
30420	Setup and Servicing Software (free of charge)
30419	Null Model RS232 Serial Cable (pc interface)
30902US	24VDC 2.5 amp Regulated Power Supply

APPLICATIONS

- **Data Storage Cabinets**
 - **Semiconductor Tools**
 - **Prison Cells**
 - **Mechanical Rooms**
 - **Air Conditioning Units**
 - **Equipment Racks**
 - **Computer Rooms**
 - **Flight Simulators**
 - **Atria**
- **Duct Applications**
 - **Heritage Buildings**
 - **Critical Equipment**
 - **Elevator Shafts**
 - **Motor Control Rooms**
 - **MRI**
 - **Tape Vaults**
 - **Record Storage**
 - **Cable Vaults**



AirSense Technology USA Limited

297 Kingsbury Grade • Suite D • Lake Tahoe • Nevada • 89449 • USA

Tel: 775-832-5327 • Fax: 503-641-1253

e-mail: sales@airsense.us • www.airsense.us